

Modeling, Analysis and Design for Carrier Aggregation in Heterogeneous Cellular Networks

Xingqin Lin, Jeffrey G. Andrews and Amitava Ghosh

Abstract—Carrier aggregation (CA) and heterogeneous base stations (HetNets) are two distinct features of next-generation cellular networks. CA increases transmission bandwidth by aggregating multiple component carriers on the physical layer, while small cells in HetNets are vital for data off-loading and can significantly improve area spectral efficiency compared to using just macrocells. In this paper, we propose a tractable multi-band multi-tier model for CA in HetNets, where base station positions in each tier follow an independent Poisson point process (PPP). Our model incorporates an appropriate notion of load. For a typical HetNet consisting of two tiers, macro and small cells, and two bands, 800MHz and 2.5GHz band, we find that small biasing factor (less than 10dB) yields little gain and the maximum biasing gain is about 25% to 40%, attained at large biasing factors. Our model also characterizes the impact of band deployment. For the typical HetNet described, our study suggests that the 800MHz band be deployed both in macro and small cells to ensure coverage and balance network load. Our study also indicates that deploying the 800MHz band and 2.5GHz band in both the macro and small cells is optimal.

I. INTRODUCTION

Carrier aggregation (CA) is considered as a key enabler for LTE-Advanced [1], which can meet or even exceed the IMT-Advanced requirement for large transmission bandwidth (40MHz-100MHz) and high peak data rate (500 Mbps in the uplink and 1 Gbps in the downlink). In particular, CA enables the concurrent utilization of multiple component carriers on the physical layer to expand the effective bandwidth [2]–[4]. The aggregated bandwidth can be as large as 100 MHz, for example, by aggregating 5 20MHz component carriers. CA is significantly different from existing multi-carrier transmission techniques, e.g., orthogonal frequency division multiplexing (OFDM). In particular, each component carrier in CA acts as a physical channel and has individual transmission modes (modulation and coding scheme). The bandwidth of these component carriers can vary widely (ranging from 1.4 MHz to 20 MHz for LTE carriers). Further, CA can be used in different spectrum scenarios including intra-band contiguous CA, intra-band non-contiguous CA and inter-band non-contiguous CA [5], which are illustrated in Fig. 1. The propagation characteristics of different component carriers may vary significantly, e.g., a component carrier in the 800MHz band has very different propagation characteristic from a component carrier in the 2.5GHz band. Due to the significance and unique char-

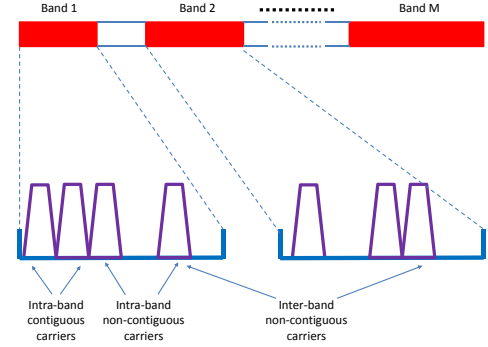


Fig. 1: Different CA spectrum scenarios: Component carriers can be either intra-band contiguous, intra-band non-contiguous or inter-band non-contiguous.

acteristics of CA, how should cellular networks be designed in order to best exploit CA?

Cellular networks are undergoing a major evolution as current cellular networks cannot keep pace with user demand through simply deploying more macro base stations (BS) [6]–[10]. As a result, attention is being shifted to deploying small, inexpensive, low-power nodes overlaid in the current macrocells. These low power nodes may include pico and femto BSs, as well as distributed antennas. Cellular networks with them take on a very heterogeneous characteristic, and are often referred to as HetNets. Not surprisingly, random spatial point process, particularly homogeneous Poisson point process (PPP) for its tractability, has been used to model the locations of the various heterogeneous BSs. Using this approach, many works (see, e.g., [11]–[14]) successfully advance the understanding on HetNets as well as the design. However, CA has not been considered in [11]–[14] yet.

In this paper we propose a tractable multi-band multi-tier model for CA in HetNets. The BS locations are modeled by PPPs while different path loss exponents are used to capture the possible large differences in the propagation characteristics of the available bands. Within this model, the user equipment (UE) performs cell selection based on the maximum received signal power. Two types of CA are considered: multi-flow CA and single flow CA, which will be defined in Section II. Essentially, multi-flow CA allows UEs to connect to multiple BSs simultaneously while using single flow CA UEs can only connect to one BS at one time. The proposed model is flexible enough to capture the main unique features of CA but yet

Xingqin Lin and Jeffrey G. Andrews are with Department of Electrical & Computer Engineering, The University of Texas at Austin, USA. (E-mail: xlin@utexas.edu, jandrews@ece.utexas.edu). Amitava Ghosh is with Nokia Siemens Networks. (E-mail: amitava.ghosh@nsn.com). This research was supported by Nokia Siemens Networks.

tractable enough for analysis.

One major concern about deploying small cells is that they have very small coverage areas due to their low transmit power. As a result, small cells are often lightly loaded and do not accomplish much, while the macrocells are still heavily loaded. To alleviate this issue, biasing allows the small cells to expand their areas [6], [7], [15], enabling more UEs to connect to small cells. It is expected that biasing can improve load balancing and thus leads to higher throughput. However, a theoretical study on the impact of biasing is challenging. While [14] modeled biasing in a *single*-band HetNet, it assumes a fully-loaded HetNet, and so correspondingly biasing does not help. In this paper we introduce an appropriate notion of load. Thanks to the proposed load-aware model, we are able to perform an extensive study on the impact of biasing on HetNet's performance and give useful design insights. For example, in a two-tier network consisting of macro and small cells we find that biasing does make small cells accomplish more when the network load is unbalanced, while biasing hurts the network performance in a fully loaded network, implying that using a fully loaded model to study biasing is inappropriate. Moreover, we find that small biasing factor (less than 10dB) yields little gain, while the maximum biasing gain is about 25% to 40%, attained at large biasing factors (between 15dB and 30dB).

Another novel contribution of this paper is to analytically study HetNet's performance under different band deployment configurations. With the incorporation of band deployment in our model, we perform a comprehensive study in a HetNet consisting of two tiers (macro and small cells) and two bands (800MHz and 2.5GHz band). Our study suggests that the 800MHz band should be deployed in both macrocells and small cells. Deploying the 800MHz band in macrocells can ensure coverage, while deploying the 800MHz band in small cells better balances network load and thus makes the small cells accomplish more (even at the cost of increased interference for cell edge UEs of small cells). Besides, we find that splitting the spectrum between different tiers is strictly suboptimal. The reason is that there is a capacity loss in macrocells by spectrum splitting and this loss can only be partially overcome by adding a large amount of small cells. Thus, it has been recognized that HetNets should allow full spectrum reuse augmented with appropriate intercell interference management [10]. Indeed, our study shows that the deployment that both the two tiers use both the two bands is optimal in many scenarios.

The rest of this paper is organized as follows. Section II describes the specific system model and defines the two CA schemes. We then present theoretical analysis on the multi-flow CA and single flow CA in Section III and IV, respectively. Section V presents some numerical results, and is followed by our conclusions in Section VI.

II. SYSTEM MODEL

We consider a general HetNet with $\mathcal{K} = \{1, \dots, K\}$ denoting the set of K tiers which may include macrocells, picocells, femtocells, and possibly other elements. BSs of different types

differ in terms of deployment density, spectrum resource, transmit power and supported modulation and coding scheme. In this section, we describe the key aspects of this model, which includes the BS and UE distribution, radio channels, UE association schemes and load modeling, and the performance metric.

A. Distributions of BSs and UEs

Though regular grid based models are popular for cellular networks, BSs cannot be perfectly regularly deployed in reality and thus some randomness must be considered. In this paper we adopt random spatial point process to model the BS locations. More specifically, the BS locations are modeled as K independent homogeneous PPPs [16]. The set of PPP distributed BSs in tier k is denoted by Φ_k with density λ_k . This Poisson assumption on BS distribution originally proposed in [17] has been recently shown to be about as accurate in terms of SINR distribution as the hexagonal grid for a representative urban cellular network [18] and has been extended to HetNets in [11] and [13].

The UEs are also assumed to be randomly distributed according to an independent PPP of density $\lambda^{(u)}$. Or equivalently, given the number of UEs in a certain area, these UEs are uniformly and independently located in this area. This uniform distribution assumption on the UE positions is popular and mainstream and is often utilized in system level simulations by industry.

B. Channel model

We assume that there are a set of M available *bands* (e.g., 800MHz, 2.5GHz, ...) denoted as $\mathcal{M} = \{1, 2, \dots, M\}$. The bandwidth of each band i is denoted by B_i and the path loss exponent of band i is denoted by α_i . Here we use different path loss exponents for different bands to capture the possible large differences in propagation characteristics associated with each band's carrier frequency.

We further assume that each band is small enough to have relatively constant path loss across it. In particular, if band i is used by tier k , the received power $\tilde{P}_{i,k}$ is modeled as

$$\tilde{P}_{i,k} = P_{i,k} H C_i d^{-\alpha_i} \quad (1)$$

where d is the length of the radio link, C_i is a constant that gives the path loss in band i when $d = 1$, H is a random variable capturing the fading effects of the radio link, and $P_{i,k}$ is the i -th band transmit power used by BSs in tier k , assumed to be fixed. Note that C_i depends strongly on carrier frequency, e.g. $C_i \cong (\mu_i/4\pi)^2$ where μ_i denotes the wavelength. For simplicity, we ignore shadowing and consider Rayleigh fading only, i.e., $H \sim \text{Exp}(1)$. In fact, as shown in [19], the randomness of the BS locations actually helps to emulate shadowing. In particular, with large enough shadowing variance (e.g., 10dB) the grid networks "converge" to Poisson networks. Thus, incorporating shadowing in Poisson networks only enlarges the performance difference between grid and Poisson networks. This implies that, to have a better performance match between grid and Poisson networks, it is not necessary to model shadowing in Poisson networks.

C. User association schemes

We consider two types of CA. The first type is called *multi-flow* CA, where UEs can be potentially associated with all the available tiers simultaneously (but in different bands) and can aggregate data using all the available bands. Assuming that the typical UE is located at the origin, in band i the UE is associated with tier k that provides the maximum biased received power, i.e., $k = \arg \max(Z_l P_{i,l} \|Y_{l_0}\|^{-\alpha_i} : l \in \mathcal{K})$, where Z_l denotes the biasing factor of tier l and Y_{l_0} denotes the location of the nearest BS in tier l . Biasing factors $\mathbf{Z} = \{Z_k : k \in \mathcal{K}\}$ are used in HetNets for the purpose of load balancing. In particular, adopting larger Z_k expands the cell range of BSs in tier k and thus more UEs can connect to tier k . Range expansion is important for HetNets. Small cells do not accomplish much without it, since they otherwise have very small coverage areas.

The second type is called *single flow* CA, where UEs can be associated with only one of the available tiers at one time, i.e., one BS at some tier, though they still can aggregate data using all the available bands used by that tier. For this type of CA, the typical UE scans over all the tiers and bands and connects to the tier that provides the strongest biased received power in some band, say i^* . Then the UE performs CA with respect to this tier. Formally, the UE connects to tier k such that $(k, i^*) = \arg \max(Z_l P_{i,l} \|Y_{l_0}\|^{-\alpha_i} : (l, i) \in \mathcal{K} \times \mathcal{M})$.

In summary, multi-flow allows the UE to perform CA across all the available bands in (possibly) different tiers,¹ while single flow allows the UE to perform CA only across the available bands by the sole selected tier. Fig. 2 demonstrates the model in question and shows the difference between multi-flow CA and single flow CA. Note that both schemes are based on long term measurements which average out the instantaneous effect of fading. This assumption is reasonable since BS selection in real cellular networks does average out short term fading, which in any case is often exploited or suppressed with various forms of diversity. For example, in most cases of interest, the bandwidth B_i is much larger than the coherence bandwidth of the channel, so the per band received power tends to the mean.

D. Load modeling

We assume that each UE connecting to tier k in band i requires a basic share b of the bandwidth resource B_i . For example, b may represent the basic frequency resource allocation unit in LTE networks. This requirement can be satisfied if tier k in band i is under-loaded, e.g., $L_{i,k} \leq B_i/b$ where $L_{i,k}$ denotes the mean number of UEs attempting to connect to one tier- k BS in band i . If $L_{i,k} > B_i/b$, this implies that too many UEs attempt to connect to tier k and correspondingly tier k becomes fully-loaded. In this case, some UEs within the coverage of tier k have to be blocked. Or equivalently, assuming all the UEs are admitted by tier k , they can only obtain a fraction of the time domain resource.

¹Note that multi-flow UEs can only connect to one tier in each band i . For example, if both the macro and small cells deploy band i , then the UE can only communicate with at most one of the nearest macro or small BS in band i .

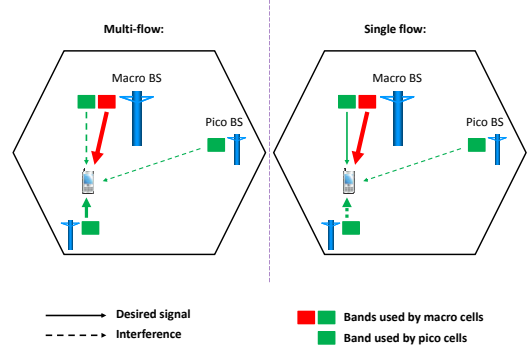


Fig. 2: System model: Multi-flow versus single flow

In the following, we stick to the former interpretation and will derive the admission probability while keeping in mind that the admission probability can also be interpreted as the fraction of the time domain resource shared by the UEs without blocking them.

For each BS in the under-loaded tier k , we assume that the location of the used bandwidth $bL_{i,k}$ in band i is uniformly and independently selected from band i . Equivalently, frequency hopping can be assumed. We further define

$$\theta_{i,k} = \min\left(\frac{bL_{i,k}}{B_i}, 1\right), \forall k \in \mathcal{K}, \forall i \in \mathcal{M}, \quad (2)$$

and refer to $\theta_{i,k}$ as the *load* of tier k in band i .

This bandwidth sharing model helps to capture the fact that the load in HetNets is often unbalanced. In particular, small cells have limited coverage and thus the mean number $L_{i,k}$ of UEs supported by per small cell is small, yielding light load $\theta_{i,k} \ll 1$. In contrast, the coverage of macrocells is much larger and thus the mean number $L_{i,k}$ of UEs supported by per macrocell is large, yielding heavy load $\theta_{i,k} \approx 1$.

E. Performance metrics

It is clear that the performance of the HetNet depends on how the available bands are deployed. So we introduce binary decision variables defined as

$$x_{i,k} = \begin{cases} 1 & \text{if band } i \text{ is used by tier } k; \\ 0 & \text{otherwise,} \end{cases}$$

for all $i \in \mathcal{M}, k \in \mathcal{K}$. We group $x_{i,k}$'s into a vector $\mathbf{x}$ denoting the band deployment configuration.

Given the band deployment configuration $\mathbf{x}$, the signal to interference-plus-noise ratio (SINR) in band i provided by tier k can be computed as

$$\text{SINR}_{i,k} = \frac{x_{i,k} P_{i,k} H_{i,k_0} \|Y_{k_0}\|^{-\alpha_i}}{\sum_{l \in \mathcal{K}} \sum_{Y \in \Phi_{i,l} \setminus Y_{k_0}} P_{i,l} H_{i,Y} \|Y\|^{-\alpha_i} + w_i},$$

where $w_i = bN_0/C_i$ with N_0 being the power spectral density of the background noise, and $\Phi_{i,k}$ is the PPP of density $\theta_{i,k} \lambda_k$ thinned from Φ_k .

We are now in a position to introduce the performance metric used in this paper. Rate is the paramount metric in CA

which aims to provide UEs with very high data rate. So the metric used is the *UE ergodic rate* which measures the long term data rate attained by a typical UE. We next explicitly define the UE ergodic rate for multi-flow CA and single flow CA, respectively.

1) *Multi-flow CA*: Using adaptive transmission schemes and treating interference as noise, the multi-flow UE ergodic rate (nats/sec) equals

$$R = \sum_{i \in \mathcal{M}} \sum_{k \in \mathcal{K}} \pi_k^{(i)} p_{i,k} b \mathbb{E}[\log(1 + \text{SINR}_{i,k})]. \quad (3)$$

Here $p_{i,k}$ denotes the multi-flow admission probability of tier k in band i . $\pi_k^{(i)}$ is the probability of the event that the typical UE connects to tier k in band i . The following conditions need to be satisfied for proper association distributions: $\sum_{k \in \mathcal{K}} \pi_k^{(i)} = 1, \forall i$, and $\pi_k^{(i)} \geq 0, \forall k, i$. Note that $\pi_k^{(i)}$ also represents the fraction of UEs served by tier k in band i and thus we refer to it as *coverage*². In summary, the UE ergodic rate is determined by three terms: admission probability $p_{i,k}$, coverage $\pi_k^{(i)}$ and spectral efficiency $\mathbb{E}[\log(1 + \text{SINR}_{i,k})]$.

2) *Single flow CA*: As in multi-flow CA, the UE ergodic rate of single flow can be computed as

$$R = \sum_{k \in \mathcal{K}} \pi_k \sum_{i \in \mathcal{M}} p_{i,k} b \mathbb{E}[\log(1 + \text{SINR}_{i,k})]. \quad (4)$$

Here $p_{i,k}$ denotes the single flow admission probability of tier k in band i . π_k is the probability of the event that the typical UE connects to tier k . As a proper probability measure, association distribution $\{\pi_k\}_{k \in \mathcal{K}}$ satisfies that $\sum_{k \in \mathcal{K}} \pi_k = 1$, and $\pi_k \geq 0, \forall k$.

The difference in UE ergodic rate for multi-flow and single flow results from the difference in the association policies. Recall that multi-flow UE can connect to multiple tiers simultaneously and performs CA correspondingly. So the typical UE can pick the “best” tier in each band to connect to. In contrast, single flow UE can only connect to one single tier and performs CA with respect to the bands used by the selected tier. Though the former is more advanced, it may not necessarily lead to better performance, which is a bit counter-intuitive. The main reason is that better received signal power is not equivalent to higher UE ergodic rate which also depends on many other factors. We will explain this fact more in Section V.

III. MULTI-FLOW ANALYSIS

In this section, we first derive formula for the multi-flow association distributions and admission probabilities. We then derive analytical expression for multi-flow UE ergodic rate. Finally, we study the corresponding lower bound and perform mean value analysis.

A. Association distributions and admission probabilities

Before deriving the association distributions, we first make the following assumption.

²The coverage defined here should not be confused with the usual definition of coverage probability, which equals one minus outage probability.

Assumption 1. Each band is used by at least one tier and each tier uses at least one band, i.e., $\sum_{k \in \mathcal{K}} x_{i,k} \geq 1, \forall i$, and $\sum_{i \in \mathcal{M}} x_{i,k} \geq 1, \forall k$.

There is no loss of generality in the above assumption since one can simply exclude the unused band and/or the useless tier. Under this assumption, the multi-flow steady state association distributions characterizing the network coverage are given in Lemma 1.

Lemma 1 (Multi-flow coverage). For multi-flow CA, let $\pi^{(i)} = (\pi_k^{(i)})_{k \in \mathcal{K}}, \forall i \in \mathcal{M}$, where $\pi_k^{(i)}$ is the fraction of UEs that connect to tier k in band i . Then,

$$\pi_k^{(i)} = \frac{1}{G^{(i)}} \cdot x_{i,k} \lambda_k (Z_k P_{i,k})^{\frac{2}{\alpha_i}}, \forall k \in \mathcal{K}, \forall i \in \mathcal{M}, \quad (5)$$

where $G^{(i)} = \sum_{l \in \mathcal{K}} x_{i,l} \lambda_l (Z_l P_{i,l})^{\frac{2}{\alpha_i}}$ is the normalization constant.

Proof: See Appendix B. ■

The association distributions are spatial averages and are also the tier connection probabilities of the typical UE. In other words, $\pi_k^{(i)}$ also denotes the probability that the typical UE is “covered” by tier k in band i . Since $\alpha_i > 2$, the association distributions are more sensitive to the variation in the BS densities than to the variation in the transmitter powers, which is also true for the throughput in wireless packet networks [20]. We further remark that Lemma 1 can also be derived following the approach used in [14]. However, the proof here may be more intuitive.

With Lemma 1, we next derive the admission probability of each tier in each band. To this end, we assume that if a BS of tier k is fully-loaded in band i , then it uniformly and independently picks those UEs in its coverage to block.

Lemma 2 (Multi-flow admission probability and load). In multi-flow CA, the admission probability and load $(p_{i,k}, \theta_{i,k})$ of tier k in band i are given by

$$(p_{i,k}, \theta_{i,k}) = \begin{cases} \left(1, \frac{b \lambda^{(u)} (Z_k P_{i,k})^{\frac{2}{\alpha_i}}}{G^{(i)} B_i} \right) & \text{if } 0 < D_{i,k} \leq \frac{B_i}{b}; \\ \left(\frac{G^{(i)} B_i}{b \lambda^{(u)} (Z_k P_{i,k})^{\frac{2}{\alpha_i}}}, 1 \right) & \text{if } D_{i,k} > \frac{B_i}{b}; \\ (0, 0) & \text{otherwise,} \end{cases}$$

where $D_{i,k} = \frac{1}{G^{(i)}} \cdot x_{i,k} \lambda^{(u)} (Z_k P_{i,k})^{\frac{2}{\alpha_i}}$.

Proof: Let $\Pi_k^{(i)}(x)$ denote the probability that the UE at position x connects tier k in band i . Then the mean number of UEs attempting to connect to a BS of tier k is given by

$$\begin{aligned} L_{i,k} &= \frac{\int_{\mathbb{R}^2} \Pi_k^{(i)}(x) \Phi^{(u)}(dx)}{\int_{\mathbb{R}^2} \Phi_k(dx)} = \frac{\int_0^{2\pi} \int_0^\infty \Pi_k^{(i)}(r, \theta) \lambda^{(u)} r dr d\theta}{\int_0^{2\pi} \int_0^\infty \lambda_k r dr d\theta} \\ &= \frac{\lambda^{(u)} \pi_k^{(i)} \int_0^{2\pi} \int_0^\infty r dr d\theta}{\lambda_k \int_0^{2\pi} \int_0^\infty r dr d\theta} = \frac{1}{G^{(i)}} \cdot x_{i,k} \lambda^{(u)} (Z_k P_{i,k})^{\frac{2}{\alpha_i}}, \end{aligned}$$

where the third equality follows from the ergodicity of PPP $\Phi^{(u)}$, i.e., $\Pi_k^{(i)}(x) = \pi_k^{(i)}, \forall x$, and plugging $\pi_k^{(i)}$ yields the last equality. So if $0 < \frac{1}{G^{(i)}} \cdot x_{i,k} \lambda^{(u)} (Z_k P_{i,k})^{\frac{2}{\alpha_i}} \leq \frac{B_i}{b}$, tier k is under-loaded in band i and thus the corresponding admission probability equals 1. If $\frac{1}{G^{(i)}} \cdot x_{i,k} \lambda^{(u)} (Z_k P_{i,k})^{\frac{2}{\alpha_i}} > \frac{B_i}{b}$, tier k

is fully-loaded in band i and the associated UEs are randomly and independently blocked and thus the corresponding admission probability equals $\frac{B_i}{G^{(i)} \cdot b\lambda^{(u)}(Z_k P_{i,k})^{\frac{2}{\alpha_i}}}$. Similarly, we can derive the load $\theta_{i,k}$. ■

Lemma 2 describes the intuitive impact of biasing on admission probability and load. If a tier is lightly loaded, increasing its biasing factor helps to increase its load and thus makes the tier accomplish more. If a tier is fully-loaded, decreasing its biasing factor helps to increase the admission probability of those UEs in its coverage and thus improves UE throughput in the long run.

B. UE ergodic rate

In this subsection, we derive the analytical formula for multi-flow UE ergodic rate defined in (3).

Proposition 1 (Multi-flow UE ergodic rate). *The multi-flow UE ergodic rate is given by*

$$R = \sum_{i \in \mathcal{M}} \sum_{k \in \mathcal{K}} 2\pi b p_{i,k} \lambda_k \int_0^\infty \int_0^\infty g_{i,k}^{(m)}(t, r) dt r dr \quad (6)$$

where

$$g_{i,k}^{(m)}(t, r) = e^{-r^{\alpha_i}(e^t - 1)P_{i,k}^{-1}w_i - r^2 \cdot \pi(Z_k P_{i,k})^{-\frac{2}{\alpha_i}}(G^{(i)} + \hat{G}_k^{(i)}(t))},$$

with $\hat{G}_k^{(i)}(t) = \sum_{l \in \mathcal{K}} \theta_{i,l} \lambda_l (Z_l P_{i,l})^{\frac{2}{\alpha_i}} \rho(Z_k Z_l^{-1}(e^t - 1), \alpha_i)$ and $\rho(y, \alpha_i) = y^{\frac{2}{\alpha_i}} \int_y^\infty \frac{1}{s^{\frac{2}{\alpha_i} + 1}} ds$.

Prop. 1 explicitly characterizes the impact of band deployment configuration $\mathbf{x}$ and biasing factors $\mathbf{Z}$ on the multi-flow UE ergodic rate. To obtain some insights, we next focus on the special interference-limited scenario where noise is ignored, i.e., $N_0 = 0$. Under this assumption, the following Corollary 1 can be derived from Prop. 1.

Corollary 1 (Interference-limited multi-flow UE ergodic rate). *If $N_0 = 0$, multi-flow UE ergodic rate is given by*

$$R = \sum_{i \in \mathcal{M}} \sum_{k \in \mathcal{K}} p_{i,k} \pi_k^{(i)} b \int_0^\infty \frac{G^{(i)}}{G^{(i)} + \hat{G}_k^{(i)}(t)} dt. \quad (7)$$

Corollary 1 gives a clean characterization of the impact of biasing on UE ergodic rate. Consider band i and assume there are only tier k and l , representing small and macro cells, respectively. The UE ergodic rate is determined by three terms: admission probability $p_{i,k}$, coverage $\pi_k^{(i)}$ and spectral efficiency $\int_0^\infty \frac{G^{(i)}}{G^{(i)} + \hat{G}_k^{(i)}(t)} dt$. Increasing $Z_k Z_l^{-1}$ moves more UEs into the coverage of small cells, i.e., $\pi_k^{(i)}$ increases. Meanwhile, admission probability $p_{i,k}$ still equals 1 since the small cells are typically under-loaded. The spectral efficiency of small cells decreases with increased $Z_k Z_l^{-1}$. The reason for the loss of spectral efficiency is that BSs in small cells need to serve UEs which are moved from macrocells by biasing and thus generally have longer radio links than the original UEs in the small cells.

In contrast, as $Z_k Z_l^{-1}$ increases, coverage $\pi_l^{(i)}$ of the macrocells decreases, while admission probability $p_{i,l}$ of macrocells, which is less than 1 since the macrocells are often fully-loaded,

increases because fewer UEs attempt to connect to macrocells. However, with increased $Z_k Z_l^{-1}$, the change of the spectral efficiency of macrocells depends on specific network parameters and is uncertain. This uncertainty stems from the fact that small BSs are uniformly distributed within the macrocell. Thus, UEs moved into small cells by biasing can have either long or short macro radio links, and correspondingly variable interference levels.

C. Lower bound and mean value analysis

In this subsection, we derive a lower bound and then based on mean value analysis give an approximate but much simpler expression for UE ergodic rate. To obtain the desired lower bound, we first note that the integration limits of $\rho(y, \alpha_i)$ are from $y^{-\frac{2}{\alpha_i}}$ to ∞ since the closest interferer is at least at some distance in cellular networks conditional on connection. If we ignore this and instead let the integration limits be from 0 to ∞ , we overestimate the interference and thus get a conservative result. In particular,

$$\begin{aligned} \rho(y, \alpha_i) &\leq y^{\frac{2}{\alpha_i}} \int_0^\infty \frac{1}{1 + s^{\frac{2}{\alpha_i}}} ds = 2y^{\frac{2}{\alpha_i}} \int_0^\infty \frac{u}{1 + u^{\alpha_i}} du \\ &= \frac{2\pi y^{\frac{2}{\alpha_i}}}{\alpha_i \sin(\frac{2\pi}{\alpha_i})} \triangleq \underline{\rho}(y, \alpha_i). \end{aligned} \quad (8)$$

Using this inequality, the following corollary follows immediately.

Corollary 2 (Lower bound on multi-flow UE ergodic rate). *A lower bound R_{lb} on multi-flow UE ergodic rate can be obtained by replacing $\rho(y, \alpha_i)$ used in $g_{i,k}^{(m)}(t, r)$ with $\underline{\rho}(y, \alpha_i)$.*

Next we adopt the following mean value approximation to derive a simpler expression for UE ergodic rate:

$$R \approx \hat{R} \triangleq \sum_{i \in \mathcal{M}} \sum_{k \in \mathcal{K}} \pi_k^{(i)} p_{i,k} b \cdot \log\left(1 + \frac{P_{i,k} \mathbb{E}[H_{i,k_0}] \mathbb{E}[\|Y_{k_0}\| | K_i = k]^{-\alpha_i}}{\mathbb{E}[I_i | K_i = k] + w_i}\right), \quad (9)$$

where K_i is the random tier that the typical UE connects to in band i , and

$$I_i = \sum_{l \in \mathcal{K}} x_{i,l} \sum_{Y \in \Phi_{i,l} \setminus Y_{k_0}} P_{i,l} H_{i,Y} \|Y\|^{-\alpha_i}.$$

From the proof in Appendix C, we know the distance $\|Y_{k_0}\|$ conditional on $K_i = k$ is Rayleigh distributed as

$$\mathbb{P}(\|Y_{k_0}\| \leq r | K_i = k) = 1 - e^{-\pi r^2 (Z_k P_{i,k})^{-\frac{2}{\alpha_i}} \sum_{l \in \mathcal{K}} \lambda_l (Z_l P_{i,l})^{\frac{2}{\alpha_i}}}$$

with the moments

$$E[\|Y_{k_0}\|^m | K_i = k] = \frac{\Gamma(1 + \frac{m}{2})}{(\pi (Z_k P_{i,k})^{-\frac{2}{\alpha_i}} \sum_{l \in \mathcal{K}} \lambda_l (Z_l P_{i,l})^{\frac{2}{\alpha_i}})^{\frac{m}{2}}}.$$

Substituting $m = 1$ in the above equation yields the conditional mean distance

$$E[\|Y_{k_0}\| | K_i = k] = \sqrt{\pi_k^{(i)}} \cdot \frac{1}{2} \sqrt{\frac{1}{\lambda_k}}. \quad (10)$$

Note that $\frac{1}{2}\sqrt{\frac{1}{\lambda_k}}$ is the mean distance to the closest BS of tier k from the typical UE without conditioning. Interestingly, the typical radio link in tier k conditional on $K_i = k$ equals this distance $\frac{1}{2}\sqrt{\frac{1}{\lambda_k}}$ multiplied by a factor of $\sqrt{\pi_k^{(i)}}$ that is less than 1. In other words, conditioning reduces the mean distance to the closest BS, which is intuitive.

Unfortunately, an exact computation for the conditional mean interference $\mathbb{E}[I_i|K_i = k]$ is tedious. Instead, we introduce a fitting parameter δ and approximate $\mathbb{E}[I_i|K_i = k]$ as follows.

$$\begin{aligned} \mathbb{E}[I_i|K_i = k] &\approx \\ &\sum_{l \in \mathcal{K}} 2\pi x_{i,l} \theta_{i,l} \lambda_l P_{i,l} \cdot E[H_{i,Y}] \cdot \int_{\delta * E[\|Y_{k_0}\| | K_i = k]}^{\infty} r^{1-\alpha_i} dr \\ &= \frac{2\pi}{\alpha_i - 2} \cdot \left(\frac{\delta^2 \pi_k^{(i)}}{4\lambda_k} \right)^{1-\frac{\alpha_i}{2}} \sum_{l \in \mathcal{K}} x_{i,l} \theta_{i,l} \lambda_l P_{i,l} \end{aligned} \quad (11)$$

where we can see the fitting parameter δ is used to tune the guard region. In particular, only those BSs outside the guard region of radius $\delta * E[\|Y_{k_0}\| | K_i = k]$ contribute to the cochannel conditional mean interference. Finally, plugging (10) and (11) into (9) yields the following approximate expression for multi-flow utilization factor:

$$\begin{aligned} \hat{R} &= \sum_{i \in \mathcal{M}} \sum_{k \in \mathcal{K}} \pi_k^{(i)} p_{i,k} b \log\{1 + Z_k^{-1} (2\sqrt{G^{(i)}})^{\alpha_i}\} \\ &\quad \left(\frac{2\pi}{\alpha_i - 2} \cdot \left(\frac{\delta^2 \pi_k^{(i)}}{4\lambda_k} \right)^{1-\frac{\alpha_i}{2}} \sum_{l \in \mathcal{K}} x_{i,l} \theta_{i,l} \lambda_l P_{i,l} + w_i \right)^{-1}. \end{aligned} \quad (12)$$

Compared to the counterpart R given in Prop. 1, the approximate expression $\hat{R}$ derived from mean value analysis has a much simpler form which involves no integration and may be more friendly to use, e.g., it may serve as the objective function for various network optimization purposes. However, the fitting parameter δ is *a priori* unknown. Thus, when applying the approximate expression $\hat{R}$, appropriate fitting parameter δ needs to be determined for example by comparing the approximate expression to the exact one. A detailed study on selecting the fitting parameter δ is beyond the scope of this paper.

IV. SINGLE FLOW ANALYSIS

In this section, we derive formulas for the single flow association distribution and admission probability and UE ergodic rate. The analysis is similar to that of multi-flow and thus this section is brief.

For single flow, we make the following additional assumption for tractability.

Assumption 2. In single flow CA, the transmit power of each tier k is not band-dependent, i.e., $P_{i,k} = P_k, \forall i \in \mathcal{M}$.

This assumption is slightly restrictive and may be relaxed in future research. The single flow association distribution is then given in Lemma 3.

Lemma 3 (Single flow coverage). For single flow CA, let $\pi =$

$(\pi_k)_{k \in \mathcal{K}}$,³ where π_k is the fraction of UEs that connect to tier k . Then,

$$\pi_k = 2\pi \lambda_k G_k, \forall k \in \mathcal{K}, \quad (13)$$

where $G_k = \int_0^\infty r h_k(r) dr$ with

$$h_k(r) = \exp(-\pi \sum_{l \in \mathcal{K}} \lambda_l \left(\frac{Z_l P_l}{Z_k P_k} \right)^{\frac{2}{\alpha_{l^*}}} r^{\frac{2\alpha_{k^*}}{\alpha_{l^*}}})$$

and $k^* = \arg \min_{i \in \mathcal{M}: x_{i,k} \neq 0} \alpha_i$.

Proof: See Appendix D. ■

With Lemma 3, we next derive the admission probability of each tier which uniformly and independently blocks UEs in its coverage if it is fully-loaded. The proof of Lemma 4 is similar to that of Lemma 2 and is omitted.

Lemma 4 (Single flow admission probability and load). In single flow CA, the admission probability and load $(p_{i,k}, \theta_{i,k})$ of tier k in band i are given by

$$(p_{i,k}, \theta_{i,k}) = \begin{cases} \left(1, \frac{2\pi b \lambda^{(u)} G_k}{B_i} \right) & \text{if } 0 < 2\pi \lambda^{(u)} G_k \leq \frac{B_i}{b}; \\ \left(\frac{B_i}{2\pi b \lambda^{(u)} G_k}, 1 \right) & \text{if } 2\pi \lambda^{(u)} G_k > \frac{B_i}{b}; \\ (0, 0) & \text{if } x_{i,k} = 0. \end{cases}$$

Finally, we derive the analytical formula for single flow UE ergodic rate defined in (4).

Proposition 2 (Single flow UE ergodic rate). The single flow UE ergodic rate is given by

$$R = \sum_{i \in \mathcal{M}} \sum_{k \in \mathcal{K}} 2\pi b \lambda_k p_{i,k} \int_0^\infty \int_0^\infty g_{i,k}^{(s)}(t, r) h_k(r) r dr dt, \quad (14)$$

where

$$\begin{aligned} g_{i,k}^{(s)}(t, r) &= \exp\{-r^{\alpha_i} (e^t - 1) P_k^{-1} w_i - \pi \sum_{l \in \mathcal{K}} \theta_{i,l} \lambda_l \cdot \\ &\quad \left(\frac{Z_l P_l}{Z_k P_k} \right)^{\frac{2}{\alpha_i}} \rho \left(\frac{Z_k}{Z_l} (e^t - 1) r^{\alpha_i (1 - \frac{\alpha_{k^*}}{\alpha_{l^*}})}, \alpha_i \right) \cdot r^{\frac{2\alpha_{k^*}}{\alpha_{l^*}}}\}. \end{aligned} \quad (15)$$

Proof: As suggested in Appendix A, we need to find the radius $r_{k,l}$ of the guard region and the single flow distance distribution $f_{\|Y_{k_0}\|}(r | K = k)$ of the associated BS Y_{k_0} in tier k . The former can be determined from that $Z_k P_k \cdot r^{-\alpha_{k^*}} = Z_l P_l \cdot r_{k,l}^{-\alpha_{l^*}}$. As for the latter, note

$$\begin{aligned} P(\|Y_{k_0}\| \geq r | K = k) &= \frac{P(\|Y_{k_0}\| \geq r, K = k)}{\pi_k} \\ &= \frac{1}{\pi_k} 2\pi \lambda_k \int_r^\infty x \cdot e^{-\pi \sum_{l \in \mathcal{K}} \lambda_l \left(\frac{Z_l P_l}{Z_k P_k} \right)^{\frac{2}{\alpha_{l^*}}} x^{\frac{2\alpha_{k^*}}{\alpha_{l^*}}}} dx, \end{aligned}$$

where the last equality can be shown by using similar arguments as in the proof of Lemma 4. Hence, $f_{\|Y_{k_0}\|}(r | K = k) = \frac{1}{\pi_k} 2\pi \lambda_k r h_k(r), r \geq 0$. The remaining proof follows as in the multi-flow case. ■

³We use π to denote both the single flow association distribution and the constant Pi. The meaning should be clear from the context.

TABLE I: Simulation parameters

Density of macrocells λ_1	$(\pi 500^2)^{-1}$
Density of small cells λ_2	$2 \times (\pi 500^2)^{-1}$
Density of UEs $\lambda^{(u)}$	$24 \times (\pi 500^2)^{-1}$
Max Tx power of macro BSs	40W
Max Tx power of small BSs	1W
Noise PSD	-174dBm
800MHz band's wavelength μ_1	0.375m
800MHz band's path loss exponent α_1	3
800MHz band's bandwidth B_1	9MHz
2.5GHz band's wavelength μ_2	0.125m
2.5GHz band's path loss exponent α_2	4
2.5GHz band's bandwidth B_2	9MHz
UE min bandwidth requirement b	1.8MHz
Band deployment	[1, 1; 1, 1]

V. NUMERICAL RESULTS

In this section, we provide some numerical results to demonstrate the analytical results. The set-up is a typical HetNet consisting of 2 tiers (macro and small cells) and 2 bands (800MHz and 2.5GHz band). The specific parameters used are summarized in Table I unless otherwise specified. We further introduce a shorthand notation $[x_{1,1}, x_{2,1}; x_{1,2}, x_{2,2}]$ to denote the band deployment configuration for ease of description. For example, configuration [1, 1; 1, 0] denotes that tier 1 uses both band 1 and band 2 while tier 2 only uses band 1.

A. The need for biasing

In this subsection, we show that, though small cells can bring significant capacity increase to the cellular networks, biasing can make small cells accomplish more if the UE density is not large. To explore this issue, we show the network sum rate, which equals UE ergodic rate multiplied by UE density, as a function of normalized density of small cells in Fig. 3. In the top subfigure we fix UE density as increasing the density of small cells, while in the bottom subfigure UE density increases proportionally with the density of small cells. Both two subfigures demonstrate that *network capacity increases almost linearly as the density of small cells increases*, which shows the promise of small cells. Furthermore, the following observations can be made.

1): In the top subfigure small cells become more and more lightly loaded because we blindly increase the density of small cells but the UE density does not grow correspondingly. In this case, we can see that biasing helps increase sum rate. For example, when $\lambda_2/\lambda_1 = 4$, the sum rate attained with 30dB biasing towards small cells is about 35% larger than the sum rate attained without biasing.

2): In the bottom subfigure the proportional increase of UE density makes small cells already have heavy user load when $\lambda_2/\lambda_1 \geq 4$. In this case, we can see that biasing does not help. Worse still, biasing reduces the sum rate when the small cells already have heavy user load. This implies that using a load balanced model to study biasing is inappropriate.

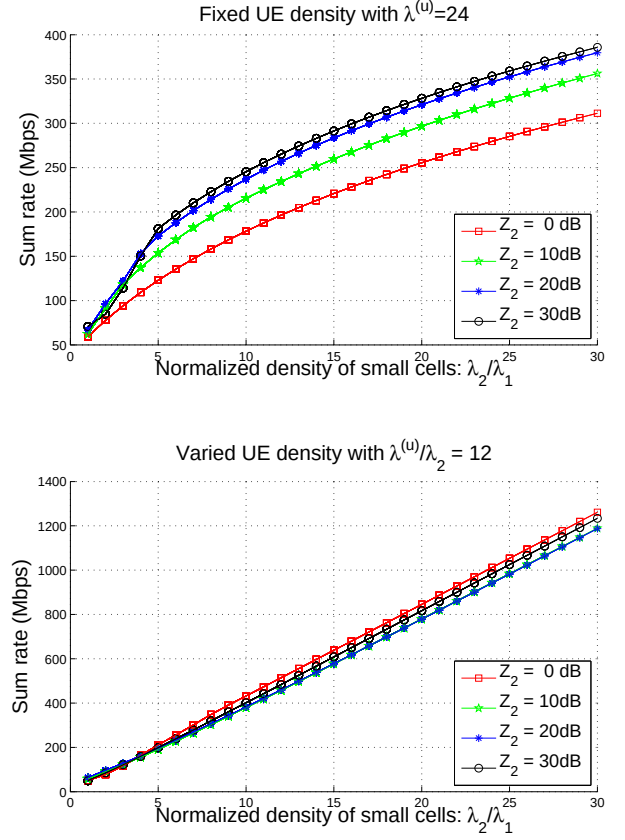


Fig. 3: Impact of the density of small cells on network sum rate: Biasing factor Z_1 of macrocells is kept constant, i.e., $Z_1 \equiv 0$ dB.

3): Comparing the two subfigures we see that sum rates attained in the top subfigure is significantly smaller than their counterparts in bottom subfigure. This is because small cells are under-utilized in the top subfigure, which results in low sum rate. This observation gives us the intuitive design rule that adding small cells should be demand-based and too many small cells will lead to waste.

B. The complex impact of biasing

In the previous subsection, we showed that biasing can help small cells accomplish more if the network load is unbalanced. In this subsection we provide more numerical results to carefully study the impact of biasing on the HetNet. For brevity, we first assume only 800MHz band exists and is used by both macro and small cells. In this single-band setting, multi-flow CA is the same as single flow CA. The impact of biasing on coverage probability, load and admission probability is shown in Fig. 4. It can be seen that the typical impact of biasing on these parameters is consistent with our previous high level discussions in Section III-B when Z_2 is “typical” in the sense that $Z_2 \in [0\text{dB}, 21\text{dB}]$. Note that, as shown in Fig. 4, the load of small cells is 1 when $Z_2 = 10\text{dB}$. However, this by no means implies that 10dB biasing gain is enough. In particular, the network still can still benefit from further increasing biasing factor Z_2 to shift more UEs from macrocells to small cells.

The impact of biasing on spectral efficiency is shown in Fig. 5, where the situation becomes more complicated. Consider small cells first. When Z_2 is typical in the sense that $Z_2 \in [0\text{dB}, 21\text{dB}]$, the top subfigure shows that the spectral efficiency of small cells decreases as Z_2 increases. This is because small cells need to serve UEs of longer radio links due to biasing, as explained in Section III-B. Interestingly, increasing Z_2 further beyond 21dB leads to increased spectral efficiency of small cells. This is because macrocells become more lightly loaded as Z_2 increases beyond 21dB (ref. Fig. 4). As a result, small cells experience less interference from macrocells, which outweighs the loss resulted from serving UEs of longer radio links. In contrast, the bottom subfigure shows that the spectral efficiency of small cells decreases as Z_2 increases. We do not observe that the spectral efficiency of small cells increases after Z_2 increases beyond some threshold value. This implies that for interference-limited small cells, as Z_2 increases, the gain from reduced cross-tier interference does not outweigh the loss from serving UEs of longer radio links.

The converse is true when it comes to the spectral efficiency of macrocells, as shown in Fig. 5. In particular, when $Z_2 \leq 21\text{dB}$, the top subfigure of Fig. 5 shows that the spectral efficiency of macrocells increases as Z_2 increases, while the bottom subfigure shows that the spectral efficiency of macrocells first decreases and then increases as Z_2 increases. The observations here are consistent with our discussion in Section III-B. Interestingly, as Z_2 increases beyond some threshold value (i.e., 10dB in Fig. 5), the spectral efficiency of macrocells keeps increasing as Z_2 increases. This is because only a few UEs of good geometry are served by macrocells. Nevertheless, this comes at the cost of the spectral efficiency of small cells.

Next we show the overall impact of biasing on UE ergodic rate. For brevity we focus on multi-flow CA in Fig. 6. As the biasing factor Z_2 of small cells increases, the UE ergodic rate first increases and then keeps almost constant for a certain range of Z_2 and finally decreases. This can be understood by examining the detailed explanations about the impact of biasing on the various aspects of the HetNet including coverage probability, load, admission probability and spectral efficiency, which together determine the UE ergodic rate. It is observed that the maximum biasing gain is about 25% to 40%, attained at large biasing factors (ranging from 15dB to 30dB). This demonstrates that *we need to work on large biasing factor for small cells in real HetNets to reap the benefit of range expansion*.

C. Band deployment

In this subsection, we provide numerical results to study how different band deployment configurations affect the HetNet performance. For brevity, we first focus on single flow CA and show the impact of different band deployment configurations on the single flow coverage π , load θ and admission

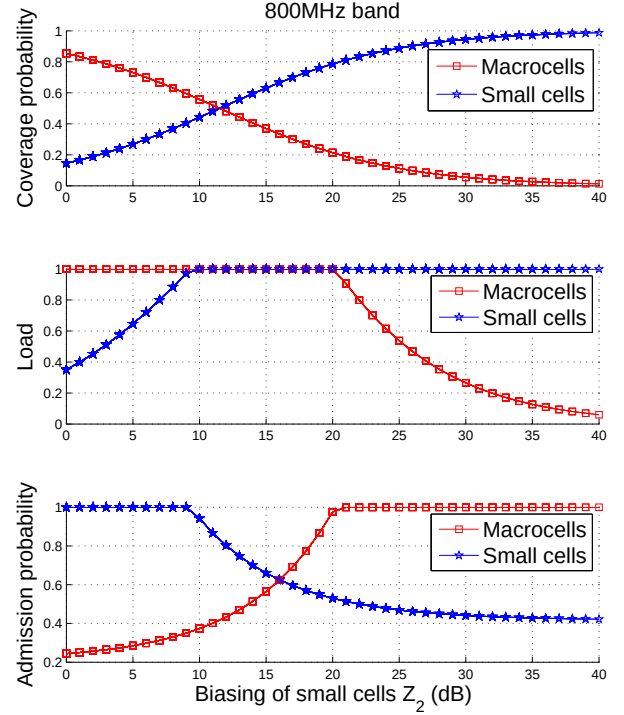


Fig. 4: Impact of biasing on coverage probability, load and admission probability.

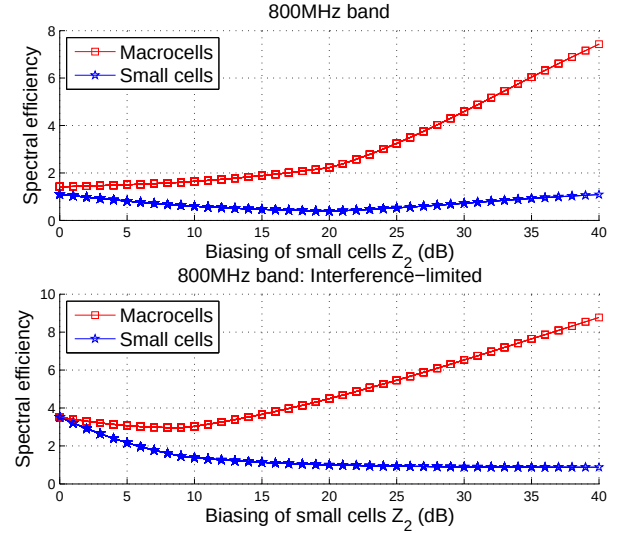


Fig. 5: Impact of biasing on spectral efficiency.

probability p in Table II.⁴ We remark on the numerical results in Table II as follows.

Deploy the 800MHz band in macrocells to ensure coverage. Examining the coverage under band deployment $[0, 1; 1, 0]$, we find that the coverage probability of the macrocells is only 0.14. This implies that in our model 86% of the UEs have to connect to the small cells. While feasible in theory, in

⁴Note that by definition $\theta_{1,k} = \theta_{2,k}$, $k = 1, 2$ unless either $x_{1,k}$ or $x_{2,k}$ is zero. For simplicity, in Table II we only show the nonzero value which represents both $\theta_{1,k}$ and $\theta_{2,k}$, while by default we understand that $\theta_{i,k}$ is 0 if $x_{i,k} = 0$. Similar rules apply to $p_{i,k}$.

	Deployment	[0, 1; 1, 0]	[1, 0; 0, 1]	[1, 0; 1, 1]	[1, 1; 1, 0]	[1, 1; 0, 1]	[1, 1; 1, 1]
Coverage	Macrocells	0.14	0.99	0.85	0.85	0.99	0.85
	Small cells	0.86	0.01	0.15	0.15	0.01	0.15
Load	Macrocells	0.66	1.00	1.00	1.00	1.00	1.00
	Small cells	1.00	0.03	0.35	0.35	0.03	0.35
Admission	Macrocells	1.00	0.21	0.24	0.24	0.21	0.24
	Small cells	0.48	1.00	1.00	1.00	1.00	1.00

TABLE II: Impact of band deployment on single flow coverage, load and admission probability

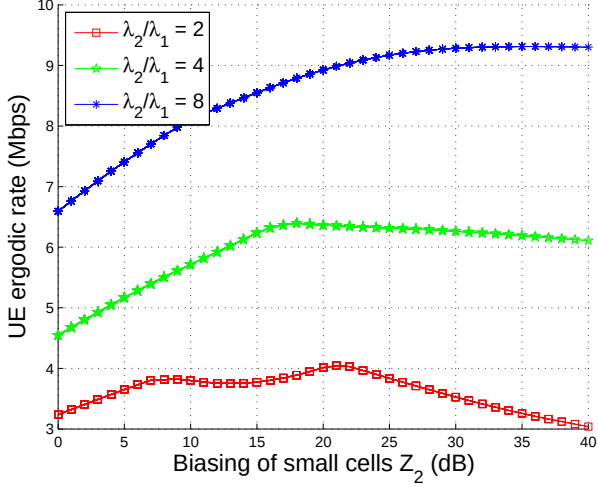


Fig. 6: Impact of biasing on multi-flow UE ergodic rate and utilization factor.

reality the 800MHz band should be deployed in macrocells to ensure coverage. Thus, in the sequel we only study those band deployment configurations with $x_{1,1} = 1$.

Deploy the 800MHz band in small cells to better balance load. Comparing the deployment [1, 0; 0, 1] to [1, 0; 1, 1], we can see that the coverage and load of small cells are very low if the 800MHz band is not used in the small cells. So we suggest that the 800MHz band be deployed in small cells too. Similar conclusions can be drawn by comparing the deployment [1, 1; 1, 0] to [1, 1; 0, 1].

We next show the impact of band deployment on single flow spectral efficiency in Table III. Generally speaking, band deployment affects the spectral efficiency through its influence on the distribution of the network load, which further affects the desired signal power as well as interference. For example, let us compare the deployment [1, 0; 0, 1] to [1, 0; 1, 1]. With deployment [1, 0; 0, 1], the load of the small cells is very low (as shown in Table II) and thus they only need to serve those UEs which are very close to them. Besides, since the macrocells do not use the 2.5GHz band, there is no cross-tier interference. These two factors lead to the very good average spectral efficiency of the small cells in the 2.5GHz band, i.e., 8.23 bps/Hz. In contrast, with deployment [1, 0; 1, 1], small cells have much higher load and need to serve UEs with longer radio links, resulting in lower spectral efficiency: 3.26 bps/Hz. Comparing further band deployment [1, 0; 1, 1] to [1, 1; 1, 1], we observe an even lower spectral efficiency (i.e., 2.4 bps/Hz)

of small cells in the 2.5GHz band due to the additional cross-tier interference from the macrocells.

Now let us study the overall impact of band deployment on single flow UE ergodic rate in Table IV, which lists all the $R_{i,k}$ as well as their sum R . We observe that the UE ergodic rate is highest with full deployment [1, 1; 1, 1], while it is lowest with orthogonal deployment [1, 0; 0, 1]. We further notice that orthogonal deployment [1, 0; 0, 1] has lower sum rate than the rate 1.57Mbps (not shown in Table IV) attained by deployment [1, 1; 0, 0],⁵ which corresponds to a 1-tier cellular network equipped with the CA feature. This demonstrates that *splitting the spectrum between different tiers in HetNets is not a good strategy*. This insight is consistent with that observed by industry. Indeed, HetNets can even have worse performance under spectrum splitting between macrocells and small cells as reported by Ericsson [8]. The reason is that there is a capacity loss in macrocells by spectrum splitting and this loss can only be partially overcome by adding a large amount of small cells. Thus, HetNets should allow spectrum reuse augmented with appropriate intercell interference management [10]. Also, comparing the rates provided by small cells under different band deployment configurations, we see again that the small cells do not accomplish much because of their limited coverage if they do not use the 800MHz band.

D. Multi-flow vs. Single flow

In this subsection, we compare the performance of multi-flow to that of single flow under different band deployment configurations. Fig. 7 shows the multi-flow and single flow UE ergodic rate as a function of the density of small cells. We can see that [1, 0; 1, 1] is almost as good as [1, 1; 1, 1]. However, [1, 0; 1, 1] has bad performance in multi-flow CA in the low small cell density regime, i.e., $\lambda_2/\lambda_1 \leq 5$, while [1, 1; 1, 1] is optimal or near optimal in both multi-flow CA and single flow CA. This suggests that *both the macro and small cells use both the 800MHz and 2.5GHz band*. However, most of the current macro BSs only support transmissions in 800MHz band. If so, we further suggest that [1, 0; 1, 1] be used. This would still provides very good performance because most of the current UEs are single flow based and thus the bad multi-flow performance of [1, 0; 1, 1] in the low small cell density regime would not bother much, at least for the time being.

Comparing the two subfigures in Fig. 7, we observe the interesting fact that *multi-flow CA does not necessarily provide*

⁵Though [1, 1; 0, 0] does not satisfy our Assumption 1 in Section III, our results can be readily applied to this scenario by simply ignoring the small cells.

	Deployment	[1, 0; 0, 1]	[1, 0; 1, 1]	[1, 1; 1, 0]	[1, 1; 0, 1]	[1, 1; 1, 1]
Macrocells	800MHz	1.30	1.35	1.35	1.30	1.35
	2.5GHz	0.00	0.00	1.75	1.62	1.69
Small cells	800MHz	0.00	1.35	1.35	0.00	1.35
	2.5GHz	8.23	3.26	0.00	6.91	2.50

TABLE III: Impact of band deployment on single flow spectral efficiency (bps/Hz)

	Deployment	[1, 0; 0, 1]	[1, 0; 1, 1]	[1, 1; 1, 0]	[1, 1; 0, 1]	[1, 1; 1, 1]
Macrocells	800MHz	0.70	0.73	0.73	0.70	0.73
	2.5GHz	0.00	0.00	0.95	0.87	0.91
Small cells	800MHz	0.00	0.51	0.51	0.00	0.51
	2.5GHz	0.27	1.23	0.00	0.23	0.91
Sum		0.98	2.58	2.19	1.80	3.06

TABLE IV: Impact of band deployment on single flow UE ergodic rate (Mbps)

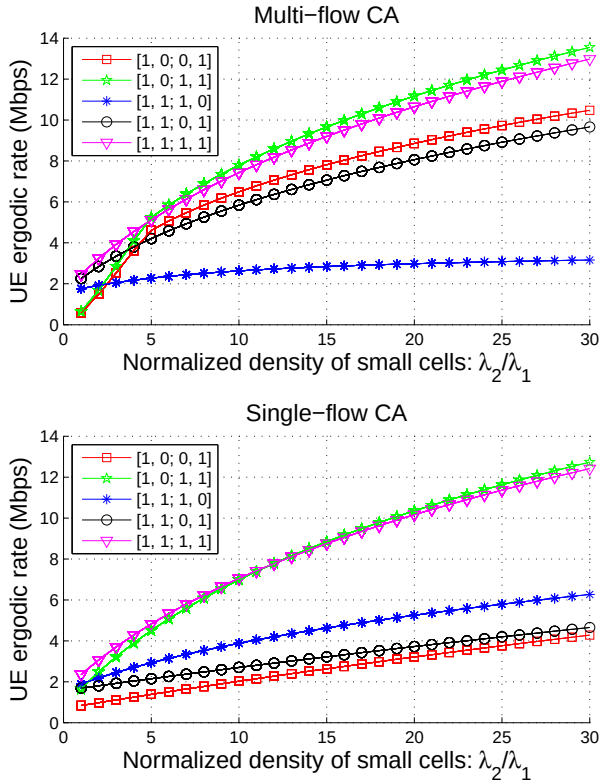


Fig. 7: Impact of band deployment on single flow UE ergodic rate

better performance than single flow CA. This might seem a bit counter-intuitive. We use the deployment $[1, 1; 1, 0]$ as an example to explain this observation. With multi-flow CA, all the UEs in the network attempt to connect to the macro tier in the 2.5GHz band, resulting in only a small share of the resource for each UE. Besides, many of these UEs have long radio links and correspondingly weak signal power. So we can improve the UE ergodic rate if we could prevent part of these UEs from connecting to the macro tier, which is implicitly implemented in the single flow CA. In particular, those single flow UEs connecting to the small cells would not pursue to use

the 2.5GHz band. Though these UEs suffer from a bit rate loss without accessing the 2.5GHz band, this significantly benefits other UEs connecting to the macrocells since they generally are UEs of good geometry w.r.t. to the macro tier and now can get a much larger share of the resource in the 2.5GHz band and thus enjoy much higher rate. We conclude that this overall results in better performance for single flow CA in terms of UE ergodic rate.

Before ending this subsection, we remark that Fig. 7 focuses on a specific scenario: no biasing and interference mitigation. In reality, deployment choices need not be restricted to $[1, 1; 1, 1]$ or $[1, 0; 1, 1]$ and there will be many operating points in between.

VI. CONCLUSIONS

This paper focuses on how to best exploit carrier aggregation in HetNets. To this end, we have proposed a general yet tractable M -band K -tier model for carrier aggregation which captures the key network parameters. In particular, this model incorporates an appropriate notion of load which allows the study of biasing, as well as the impact of band deployment. Under this model, we derive analytical expressions which explicitly express the dependency of the network metrics on the biasing factors and band deployment configuration. This work can be extended in a number of ways. In particular, many other distinct features such as multiple-input multiple-output (MIMO) technique, coordinated multi-point transmission/reception (CoMP) and device-to-device (D2D) communications should be jointly studied with CA.

ACKNOWLEDGMENT

The authors thank Rapeepat Ratasuk and Bishwarup Mondal of Nokia Siemens Networks for their help in identifying the problem and refining system model and numerical results.

APPENDIX

A. The CCDF of SINR of band i in tier k

We derive the CCDF of SINR of band i in tier k , which lays the foundation for the analysis in this paper. The derivation is

mainly based on the tool of stochastic geometry and follows the main technique used in [14], [18].

To this end, we first write the CCDF of SINR of band i in tier k as

$$\mathbb{P}(\text{SINR}_{i,k} \geq \Gamma) = \int_0^\infty \mathbb{E} \left[\mathbb{P} \left(\frac{P_{i,k} H_{i,k_0} r^{-\alpha_i}}{I_i + w_i} \geq \Gamma \right) \right] f_{\|Y_{i,k_0}\|}(r) dr, \quad (16)$$

where $I_i = \sum_{l \in \mathcal{K}} I_{i,l}$ with $I_{i,l} = \sum_{Y \in \tilde{\Phi}_{i,l} \setminus Y_{k_0}} P_{i,l} H_{i,Y} \|Y\|^{-\alpha_i}$, and $f_{\|Y_{i,k_0}\|}(r)$ is the distance distribution of the associated BS Y_{i,k_0} . Note $f_{\|Y_{i,k_0}\|}(r)$ depends on the specific association strategies. We will derive $f_{\|Y_{i,k_0}\|}(r)$ later for multi-flow CA and single flow CA, respectively. Here,

$$\mathbb{E} \left[\mathbb{P} \left(\frac{P_{i,k} H_{i,k_0} r^{-\alpha_i}}{I_i + w_i} \geq \Gamma \right) \right] = \mathbb{E} \left[\mathbb{P}(H_{i,k_0} \geq r^{\alpha_i} \Gamma P_{i,k}^{-1} (I_i + w_i)) \right] \quad (17)$$

$$= \mathbb{E} \left[\exp(-r^{\alpha_i} \Gamma P_{i,k}^{-1} (I_i + w_i)) \right] \quad (18)$$

$$= \exp(-r^{\alpha_i} \Gamma P_{i,k}^{-1} w_i) \prod_{l \in \mathcal{K}} \mathcal{L}_{i,l}(r^{\alpha_i} \Gamma P_{i,k}^{-1}) \quad (19)$$

where $\mathcal{L}_{i,l}(s) = \mathbb{E}[e^{-s I_{i,l}}]$ is the Laplace transform of $I_{i,l}$, (18) follows from the fact that $H_{i,k_0} \sim \text{Exp}(1)$, and (19) follows from the independence of the K underlying PPPs. Following similar arguments as in [18], we have that $\mathcal{L}_{i,l}(r^{\alpha_i} \Gamma P_{i,k}^{-1})$ equals

$$\mathbb{E} \left[e^{-r^{\alpha_i} \Gamma P_{i,k}^{-1} \cdot \sum_{Y \in \tilde{\Phi}_{i,l} \setminus Y_{k_0}} P_{i,l} H_{i,Y} \|Y\|^{-\alpha_i}} \right] \quad (20)$$

$$= \mathbb{E} \left[\prod_{Y \in \tilde{\Phi}_{i,l} \setminus Y_{k_0}} \mathbb{E} \left[e^{-r^{\alpha_i} \Gamma P_{i,k}^{-1} \cdot P_{i,l} \|Y\|^{-\alpha_i} H_{i,Y}} \right] \right] \quad (21)$$

$$= \mathbb{E} \left[\prod_{Y \in \tilde{\Phi}_{i,l} \setminus Y_{k_0}} \frac{1}{1 + r^{\alpha_i} \Gamma P_{i,l} P_{i,k}^{-1} \|Y\|^{-\alpha_i}} \right] \quad (22)$$

$$= e^{-2\pi\theta_{i,l}\lambda_l \int_{r_{i,k,l}}^\infty \frac{t}{1 + r^{-\alpha_i} \Gamma^{-1} P_{i,l}^{-1} P_{i,k} \cdot t^{\alpha_i}} dt} \quad (23)$$

In (21) and (22), we use the independent and identically Rayleigh distributed assumption on the interference fading, i.e., $H_{i,Y} \sim \text{Exp}(1)$, and the fact $\mathbb{E}[e^{-sH}] = \frac{\lambda}{\lambda+s}$ where $H \sim \text{Exp}(\lambda)$. In (23), we apply the probability generating functional of PPP (see, e.g., [16]). Note the last integration limits are from $r_{i,k,l}$ to ∞ since, conditional on association with some tier k in band i , the closest interferer in tier l is at least at some distance $r_{i,k,l}$ which depends on the specific association strategy. We will specify $r_{i,k,l}$ later. Now (19) can be further simplified as

$$\mathbb{E} \left[\mathbb{P} \left(\frac{P_{i,k} H_{i,k_0} r^{-\alpha_i}}{I_i + w_i} \geq \Gamma \right) \right] = e^{-r^{\alpha_i} \Gamma P_{i,k}^{-1} w_i - \sum_{l \in \mathcal{K}} 2\pi\theta_{i,l}\lambda_l \int_{r_{i,k,l}}^\infty \frac{t dt}{1 + r^{-\alpha_i} \Gamma^{-1} P_{i,l}^{-1} P_{i,k} \cdot t^{\alpha_i}}} \quad (24)$$

Furthermore,

$$\int_{r_{i,k,l}}^\infty \frac{t}{1 + r^{-\alpha_i} \Gamma^{-1} P_{i,l}^{-1} P_{i,k} \cdot t^{\alpha_i}} dt \leq \int_0^\infty \frac{t}{1 + r^{-\alpha_i} \Gamma^{-1} P_{i,l}^{-1} P_{i,k} \cdot t^{\alpha_i}} dt = \frac{\pi(\Gamma P_{i,l} P_{i,k}^{-1})^{\frac{2}{\alpha_i}}}{\alpha_i \sin(\frac{2\pi}{\alpha_i})} \cdot r^2.$$

Thus, we can lower bound (24) as

$$\mathbb{E} \left[\mathbb{P} \left(\frac{P_{i,k} H_{i,k_0} r^{-\alpha_i}}{I_i + w_i} \geq \Gamma \right) \right] \geq e^{-r^{\alpha_i} \Gamma P_{i,k}^{-1} w_i - \sum_{l \in \mathcal{K}} \frac{2\pi^2 \theta_{i,l} \lambda_l (\Gamma P_{i,l} P_{i,k}^{-1})^{\frac{2}{\alpha_i}}}{\alpha_i \sin(\frac{2\pi}{\alpha_i})} \cdot r^2}. \quad (25)$$

If we further obtain $f_{\|Y_{i,k_0}\|}(r)$ and $r_{i,k,l}$, we can evaluate the CCDF of SINR of band i in tier k (resp. its lower bound) by plugging (24) (resp. (25)) into (16).

B. Proof of Lemma 1

The association distribution is equivalent to the tier connection distribution of the typical UE. Let K_i be the random tier that the typical UE connects to in band i . We next compute its probability mass function (pmf) as follows:

$$\begin{aligned} \pi_k^{(i)} &= \mathbb{P}(K_i = k) \\ &= \mathbb{P}(Z_k P_{i,k} \|Y_{k_0}\|^{-\alpha_i} = \max_{l \in \mathcal{K}} (Z_l P_{i,l} \|Y_{l_0}\|^{-\alpha_i})) \\ &= \mathbb{P}(\pi \|Y_{k_0}\|^2 (Z_k P_{i,k})^{-\frac{2}{\alpha_i}} = \min_{l \in \mathcal{K}} (\pi \|Y_{l_0}\|^2 (Z_l P_{i,l})^{-\frac{2}{\alpha_i}})) \end{aligned}$$

It is known that in PPP $\|Y_{l_0}\|$ is Rayleigh distributed [21], i.e., the probability density function (pdf) of $\|Y_{l_0}\|$ is given by

$$f_{\|Y_{l_0}\|}(r) = 2\pi\lambda_l r e^{-\pi\lambda_l r^2}, \quad r \geq 0,$$

from which we can derive that $\pi \|Y_{l_0}\|^2 (Z_l P_{i,l})^{-\frac{2}{\alpha_i}} \sim \text{Exp}((Z_l P_{i,l})^{\frac{2}{\alpha_i}} \lambda_l), \forall l \in \mathcal{K}$. These exponentially distributed random variables are independent since the underlying K PPPs are assumed to be independent. It follows that the probability that the k -th one is the smallest among the K independent exponential random variables is

$$\mathbb{P}(K_i = k) = \frac{\lambda_k (Z_k P_{i,k})^{\frac{2}{\alpha_i}}}{\sum_{l \in \mathcal{K}} \lambda_l (Z_l P_{i,l})^{\frac{2}{\alpha_i}}}. \quad (26)$$

Taking into account the configuration of the band deployment, we have

$$\pi_k^{(i)} = \mathbb{P}(K_i = k) = \frac{1}{G^{(i)}} \cdot x_{i,k} \lambda_k (Z_k P_{i,k})^{\frac{2}{\alpha_i}}, \quad (27)$$

where the denominator cannot equal 0 due to our assumption that each band is used by at least one tier.

C. Proof of Proposition 1

Denote $R_i|_{K_i=k} = \mathbb{E}[\log(1 + \text{SINR}_{i,k})|K_i = k]$. Note that

$$\begin{aligned} \mathbb{E}[\log(1 + \text{SINR}_{i,k})|K_i = k] &= \int_0^\infty \mathbb{E} \left[\log \left(1 + \frac{P_{i,k} H_{i,k_0} r^{-\alpha_i}}{I_i + w_i} \right) \right] f_{\|Y_{k_0}\|}(r|K_i = k) dr. \end{aligned} \quad (28)$$

where $f_{\|Y_{k_0}\|}(r|K_i = k)$ can be derived as follows:

$$\begin{aligned} \mathbb{P}(\|Y_{k_0}\| \geq r|K_i = k) \\ = \mathbb{P}\left(\pi\|Y_{k_0}\|^2(Z_k P_{i,k})^{-\frac{2}{\alpha_i}} \geq \pi r^2(Z_k P_{i,k})^{-\frac{2}{\alpha_i}}|K_i = k\right) \end{aligned} \quad (29)$$

$$= \mathbb{P}\left(\min(\pi\|Y_{l_0}\|^2(Z_l P_{i,l})^{-\frac{2}{\alpha_i}} : l \in \mathcal{K}) \geq \pi r^2(Z_k P_{i,k})^{-\frac{2}{\alpha_i}}\right) \quad (30)$$

$$= \prod_{l \in \mathcal{K}} \mathbb{P}\left(\pi\|Y_{l_0}\|^2(Z_l P_{i,l})^{-\frac{2}{\alpha_i}} \geq \pi r^2(Z_k P_{i,k})^{-\frac{2}{\alpha_i}}\right) \quad (31)$$

$$= e^{-\pi r^2(Z_k P_{i,k})^{-\frac{2}{\alpha_i}} \sum_{l \in \mathcal{K}} \lambda_l (Z_l P_{i,l})^{\frac{2}{\alpha_i}}}, \quad (32)$$

where (31) follows since the exponential random variables in question are independent. Taking into account the configuration of the band deployment, the pdf of $\|Y_{k_0}\|$ conditioned on $K_i = k$ is given as follows.

$$\begin{aligned} f_{\|Y_{k_0}\|}(r|K_i = k) \\ = 2\pi r (Z_k P_{i,k})^{-\frac{2}{\alpha_i}} G^{(i)} \cdot e^{-\pi r^2(Z_k P_{i,k})^{-\frac{2}{\alpha_i}} G^{(i)}}, r \geq 0. \end{aligned} \quad (33)$$

Also,

$$\begin{aligned} \mathbb{E}\left[\log\left(1 + \frac{P_{i,k} H_{i,k_0} r^{-\alpha_i}}{I_i + w_i}\right)\right] \\ = \int_0^\infty \mathbb{E}\left[\mathbb{P}\left(\log\left(1 + \frac{P_{i,k} H_{i,k_0} r^{-\alpha_i}}{I_i + w_i}\right) > t\right)\right] dt \\ = \int_0^\infty \mathbb{E}\left[\mathbb{P}\left(H_{i,k_0} > r^{\alpha_i}(e^t - 1)P_{i,k}^{-1}(I_i + w_i)\right)\right] dt. \end{aligned} \quad (34)$$

By comparing (34) to (17), we note the only difference is that the term Γ in (17) is replaced by $e^t - 1$ in (34). So we can directly utilize the result given in (24). We further simplify (24) by using the fact that $r_{i,k,l} = (Z_l P_{i,l})^{\frac{1}{\alpha_i}} (Z_k P_{i,k})^{-\frac{1}{\alpha_i}} r$ in multi-flow CA and changing the variable t to $s = (r^{\alpha_i} \Gamma P_{i,l} P_{i,k}^{-1})^{-\frac{2}{\alpha_i}} t^2$ to get

$$\begin{aligned} \mathbb{E}\left[\mathbb{P}\left(\frac{P_{i,k} H_{i,k_0} r^{-\alpha_i}}{I_i + w_i} \geq \Gamma\right)\right] \\ = e^{-r^{\alpha_i} \Gamma P_{i,k}^{-1} w_i - r^2 \cdot \pi (Z_k P_{i,k})^{-\frac{2}{\alpha_i}} \hat{G}^{(i)}}, \end{aligned} \quad (35)$$

where $\hat{G}_k^{(i)} = \sum_{l \in \mathcal{K}} \theta_{i,l} \lambda_l (Z_l P_{i,l})^{\frac{2}{\alpha_i}} \rho(\Gamma Z_k Z_l^{-1}, \alpha_i)$ and $\rho(y, \alpha_i) = y^{\frac{2}{\alpha_i}} \int_{y^{-\frac{2}{\alpha_i}}}^\infty \frac{1}{1+s^{\frac{2}{\alpha_i}}} ds$. Thus, plugging (27), (33) and (35) (with Γ substituted by $e^t - 1$) into $R = \sum_{i \in \mathcal{M}} \sum_{k \in \mathcal{K}} \pi_k^{(i)} b R_{i|K_i=k}$ yields the desired result.

D. Proof of Lemma 3

In single flow CA, the typical UE scans over all the tiers and bands and then connects to the tier k that provides the strongest biased received power in some band say $k^* \in \mathcal{M}$. Then the UE performs CA with respect to this selected tier.

Let K be the random tier that the UE connects to. Then,

$$\begin{aligned} \pi_k &= \mathbb{P}(K = k) \\ &= \mathbb{P}(Z_k P_k \|Y_{k_0}\|^{-\alpha_{k^*}} = \max_{l,i} (Z_l P_l \|Y_{l_0}\|^{-\alpha_i})) \end{aligned} \quad (36)$$

$$\begin{aligned} &= \mathbb{P}(Z_k P_k \|Y_{k_0}\|^{-\alpha_{k^*}} = \max_{l \in \mathcal{K}} (Z_l P_l \|Y_{l_0}\|^{-\alpha_{l^*}} : l \in \mathcal{K})) \\ &= \prod_{l \neq k} \mathbb{P}(\pi(Z_l P_l)^{-\frac{2}{\alpha_{l^*}}} \|Y_{l_0}\|^2 \geq \pi(Z_k P_k)^{-\frac{2}{\alpha_{l^*}}} \|Y_{k_0}\|^{\frac{2\alpha_{k^*}}{\alpha_{l^*}}}) \\ &= \prod_{l \neq k} E\left[P\left(\|Y_{l_0}\|^2 \geq \frac{\pi(Z_k P_k)^{-\frac{2}{\alpha_{l^*}}}}{\pi(Z_l P_l)^{-\frac{2}{\alpha_{l^*}}}} \|Y_{k_0}\|^{\frac{2\alpha_{k^*}}{\alpha_{l^*}}}\right) \mid \|Y_{k_0}\|\right] \\ &= \prod_{l \neq k} E\left[\exp\left(-\pi \lambda_l \left(\frac{Z_l P_l}{Z_k P_k}\right)^{\frac{2}{\alpha_{l^*}}} \|Y_{k_0}\|^{\frac{2\alpha_{k^*}}{\alpha_{l^*}}}\right) \mid \|Y_{k_0}\|\right] \end{aligned} \quad (37)$$

$$\begin{aligned} &= \prod_{l \neq k} \int_0^\infty e^{-\pi \lambda_l \left(\frac{Z_l P_l}{Z_k P_k}\right)^{\frac{2}{\alpha_{l^*}}} r^{\frac{2\alpha_{k^*}}{\alpha_{l^*}}}} \cdot 2\pi \lambda_k r \exp(-\pi \lambda_k r^2) dr \\ &= 2\pi \lambda_k \int_0^\infty r \exp\left(-\pi \sum_{l \in \mathcal{K}} \lambda_l \left(\frac{Z_l P_l}{Z_k P_k}\right)^{\frac{2}{\alpha_{l^*}}} r^{\frac{2\alpha_{k^*}}{\alpha_{l^*}}}\right) dr \end{aligned} \quad (38)$$

where we use $\pi(Z_l P_{i,l})^{-\frac{2}{\alpha_i}} \|Y_{l_0}\|^2 \sim \text{Exp}((Z_l P_{i,l})^{\frac{2}{\alpha_i}} \lambda_l)$ in (37) and the fact that $\|Y_{k_0}\|$ is Rayleigh distributed in (38).

REFERENCES

- [1] 3GPP, "Technical specification group services and system aspects; technical specifications and technical reports for a UTRAN-based 3GPP system (Release 10)," 3GPP TS 21.101 V10.2.0, Tech. Rep., March 2012.
- [2] M. Iwamura, K. Etemad, M.-H. Fong, R. Nory, and R. Love, "Carrier aggregation framework in 3GPP LTE-advanced [WiMAX/LTE update]," *IEEE Communications Magazine*, vol. 48, no. 8, pp. 60–67, August 2010.
- [3] R. Ratasuk, D. Tolli, and A. Ghosh, "Carrier aggregation in LTE-advanced," in *IEEE 71st Vehicular Technology Conference (VTC 2010-Spring)*, May 2010, pp. 1–5.
- [4] G. Yuan, X. Zhang, W. Wang, and Y. Yang, "Carrier aggregation for LTE-advanced mobile communication systems," *IEEE Communications Magazine*, vol. 48, no. 2, pp. 88–93, February 2010.
- [5] S. Parkvall, E. Dahlman, A. Furuskär, Y. Jading, M. Olsson, S. Wanstedt, and K. Zangi, "LTE-advanced - Evolving LTE towards IMT-advanced," in *IEEE 68th Vehicular Technology Conference (VTC 2008-Fall)*, September 2008, pp. 1–5.
- [6] A. Ghosh, J. G. Andrews, N. Mangalvedhe, R. Ratasuk, B. Mondal, M. Cudak, E. Visotsky, T. A. Thomas, P. Xia, H. S. Jo, H. S. Dhillon, and T. Novlan, "Heterogeneous cellular networks: From theory to practice," *IEEE Communications Magazine*, June 2012.
- [7] Qualcomm, "LTE advanced: Heterogeneous networks," *white paper*, January 2011.
- [8] S. Landström, A. Furuskär, K. Johansson, L. Falconetti, and F. Kronstedt, "Heterogeneous networks - increasing cellular capacity," *Ericsson Review*, February 2011.
- [9] J. G. Andrews, H. Claussen, M. Dohler, S. Rangan, and M. C. Reed, "Femtocells: Past, present, and future," *IEEE Journal on Selected Areas in Communications*, vol. 30, no. 3, pp. 497–508, April 2012.
- [10] A. Damnjanovic, J. Montojo, Y. Wei, T. Ji, T. Luo, M. Vajapeyam, T. Yoo, O. Song, and D. Malladi, "A survey on 3GPP heterogeneous networks," *IEEE Wireless Communications*, vol. 18, no. 3, pp. 10–21, June 2011.
- [11] H. S. Dhillon, R. K. Ganti, F. Baccelli, and J. G. Andrews, "Modeling and analysis of K-tier downlink heterogeneous cellular networks," *IEEE Journal on Selected Areas in Communications*, vol. 30, no. 3, pp. 550–560, April 2012.
- [12] W. C. Cheung, T. Q. S. Quek, and M. Kountouris, "Throughput optimization, spectrum allocation, and access control in two-tier femtocell networks," *IEEE Journal on Selected Areas in Communications*, vol. 30, no. 3, pp. 561–574, April 2012.

- [13] S. Mukherjee, "Distribution of downlink SINR in heterogeneous cellular networks," *IEEE Journal on Selected Areas in Communications*, vol. 30, no. 3, pp. 575–585, April 2012.
- [14] H.-S. Jo, Y. J. Sang, P. Xia, and J. G. Andrews, "Heterogeneous cellular networks with flexible cell association: A comprehensive downlink sinr analysis," *IEEE Transactions on Wireless Communications*, vol. 11, no. 10, pp. 3484–3495, October 2012.
- [15] D. López-Pérez, X. Chu, and I. Guvenc, "On the expanded region of picocells in heterogeneous networks," *IEEE Journal of Selected Topics in Signal Processing*, vol. 6, no. 3, pp. 281–294, 2012.
- [16] D. Stoyan, W. Kendall, J. Mecke, and L. Ruschendorf, *Stochastic Geometry and Its Applications*. Wiley New York, 1995.
- [17] T. X. Brown, "Cellular performance bounds via shotgun cellular systems," *IEEE Journal on Selected Areas in Communications*, vol. 18, no. 11, pp. 2443–2455, 2000.
- [18] J. G. Andrews, F. Baccelli, and R. Ganti, "A tractable approach to coverage and rate in cellular networks," *IEEE Transactions on Communications*, vol. 59, no. 11, pp. 3122–3134, November 2011.
- [19] B. Blaszcyszyn, M. K. Karray, and H.-P. Keeler, "Using Poisson processes to model lattice cellular networks," July 2012. Available at <http://arxiv.org/abs/1207.7208v1>.
- [20] M. Win, P. Pinto, and L. Shepp, "A mathematical theory of network interference and its applications," *Proceedings of the IEEE*, vol. 97, no. 2, pp. 205–230, February 2009.
- [21] F. Baccelli and B. Blaszcyszyn, *Stochastic Geometry and Wireless Networks - Part I: Theory*. Now Publishers Inc, 2009.